PRIMESTAR®

Primestar Wall Mount Rack

Standard unit of 19" PRIMESTAR rack comprises of the following items :



- Vented top & bottom cover
- Rack framework
- 1 front Perspex (Acrylic) door with lock (with Frame)
- 2 detachable side panel with screw
- 4 adjustable panel mounting members
- 1 row power points
- Cable with plug top
- 20 sets of M6 caged nuts
- Epoxy high quality powder coated finishing (Black Colour)

Dimension For 19" Wall Mount Rack



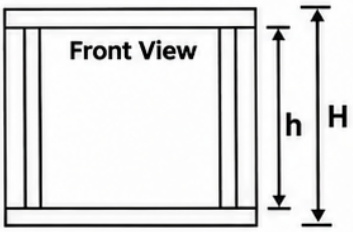

MODEL				Over All Height (mm)	Internal Height (mm)	Power Outlet (13AMP)	Weight (kg) 500mm D
Size	400mm D	500mm D	600mm D				
6U x 19"	WM0664	WM0665	WM0666	337	267	3 Socket	17
9U x 19"	WM0964	WM0965	WM0966	470	400	3 Socket	20
12U x 19"	WM1264	WM1265	WM1266	603	533	3 Socket	23
15U x 19"	WM1564	WM1565	WM1566	737	667	3 Socket	26
18U x 19"	WM1864	WM1865	WM1866	870	800	3 Socket	29

2-Post Open Frame Rack

The Primestar 2 post Open Rack Offer a quality Solution for the economic installation of rack-mountable networking equipment. The 2-Post Rack Offers cost conscious customers a simple solution for rack mounting network equipment in a secure managed environment including data centers, wiring closets and co-location facilities.



MODEL	Product Code	Over All Height (mm)
42U	20R4200	2037
46U	20R4600	2215

2-Post with Trunking for Cable Management

The Primestar 2 post Open Rack with Trunking offers a quality cable management solution for the installation of networking installation.



MODEL	Product Code	Over All Height (mm)
42U	2TOR4200	2037
46U	2TOR4600	2215