


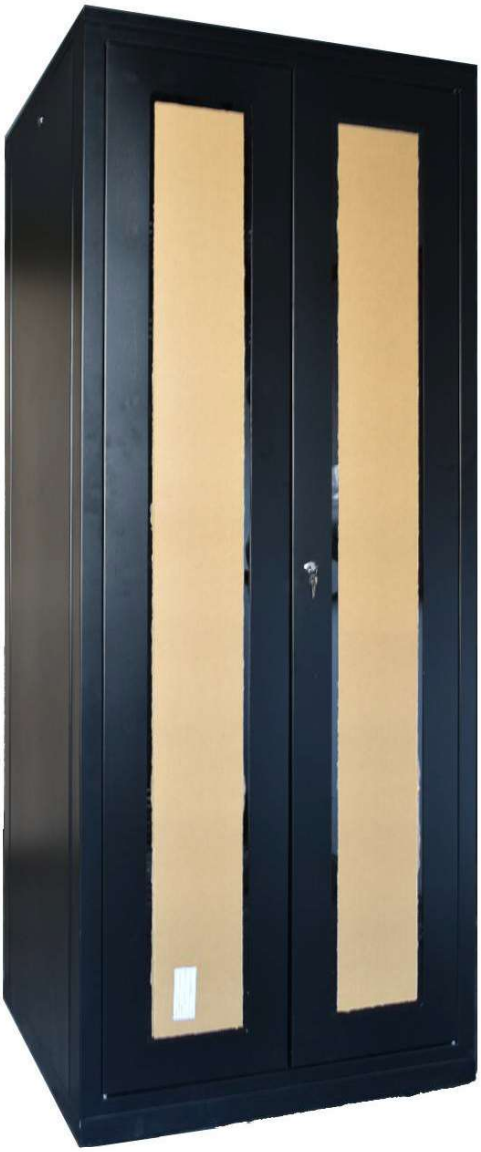

PRIMESTAR TRUNKING FLOOR STAND SERVER RACK

- Honeycomb Perforation - 800kg static load - CKD Welded Frame - Rapid Delivery - Economical Costing -

Perforated/Perspex Front Door, Vented Rear Door, Detachable Side Panels, Vertical Cable Management Trunking, 19" Panel Mounting, Ventilation Fans, Equipment Trays, Power Distribution Unit, Castor Wheels, Adjustable Levelers.

TFS 42 8 1

Primestar Trunking Floor Stand Server Rack	Rack height	Rack width	Rack depth
	42 - 42U (2050mm)	8 - 800mm	8 - 800mm
	37 - 37U (1830mm)		1 - 1000mm
	33 - 33U (1650mm)		11 - 1100mm
	28 - 28U (1430mm)		12 - 1200mm
	24 - 24U (1250mm)		
	18 - 18U (980mm)		
	15 - 15U (850mm)		